
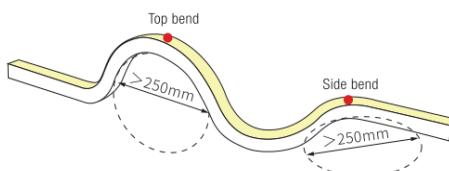

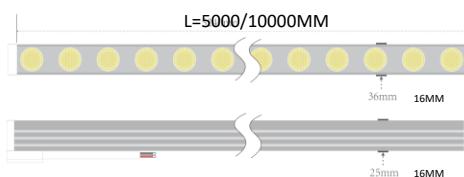


▼ 1616

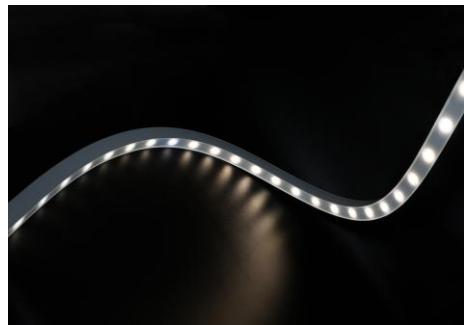

## ▼ Characteristic

### 1. Eco-Friendly Optical-Grade Silicone

-Crafted with high-transparency, optical-grade silicone that is environmentally friendly and engineered for exceptional durability. It offers strong resistance to salt, acids, alkalis, UV exposure, and flames—ideal for harsh outdoor conditions.

### 2. Flexible Form, Perfect Fit

-Innovative free-bending structural design enables seamless application across a variety of curved architectural surfaces. Designed to deliver uniform and smooth wall washing effects without light breakpoints.

### 3. IP67 Seamless Waterproofing

-Built with an integrated extrusion molding process to ensure consistent waterproof performance. Rated IP67 for long-term reliability in outdoor environments.

### 4. Patented Optical System

-Equipped with a proprietary lens design offering multiple beam angle options to suit different lighting requirements—precise, efficient, and visually refined.

### 5. Concealed End Cap Design

-A minimalist hidden end cap ensures a clean visual finish. Tool-free installation design supports rapid and secure mounting.

## ▼ Application

► Infrastructure: Airport, Railway Station, Bridge, Municipal building, Tunnel

► Urban: Administrative Building, Commercial Building, Hotel, Mall

► Cultural and Entertainment: Pavilion, Plaza, Village, Amusement park, Monuments, Cathedral, Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available,  
Pls confirm before ordering.



ON/OFF 0-10V DAL DMX TRIAC

## ▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	Beam angle	VOLT	CUTTING (mm)	Control Mode
FlexWash-06_1616	W16xH16mm	3D Bending (Φ>250mm)	15	>80	Mono 2700-6500K	1050~1125	15°,20°,30°,45°,60°,20x30°,20x36°,25x45°,20x55°	DC24V	41.5	ON/OFF
FlexWash-06_1616	W16xH16mm	3D Bending (Φ>250mm)	15	>80	Tunable White 2700-6500K	1050~1125	15°,20°,30°,45°,60°,20x30°,20x36°,25x45°,20x55°	DC24V	41.5	ON/OFF


FlexWash-06_1616	W16xH16mm	3D Bending ( $\Phi > 250\text{mm}$ )	15	/	Chromatic ( RGBW )	525	30°,45°,60°,20x30°,20x36°,25x45°,20x55°	DC24V	/	ON/OFF
FlexWash-06_1616	W16xH16mm	3D Bending ( $\Phi > 250\text{mm}$ )	15	/	Chromatic ( RGBW )	525	30°,45°,60°,20x30°,20x36°,25x45°,20x55°	DC24V	/	ON/OFF

!Notes:


1. Finish: White, and customized Black, Grey available
2. It has six different sizes from 15W~48W.

## ▼ Installation Method





### Surface Mounted

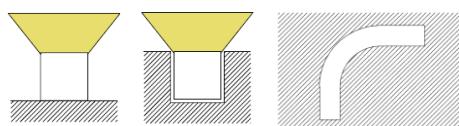

## ▼ Outlet Method

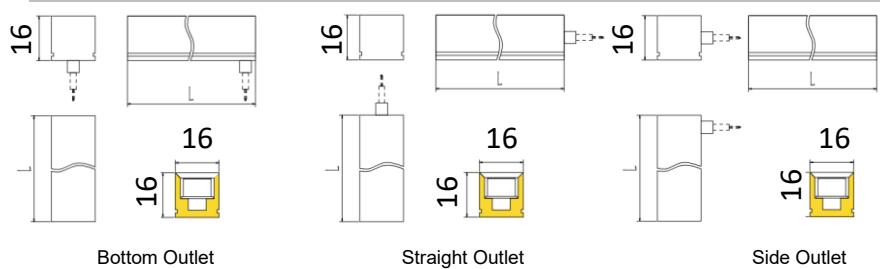

## ▼ Photometric curve




30°

45°

Tilt°

20x30°

### ▼ Accessories

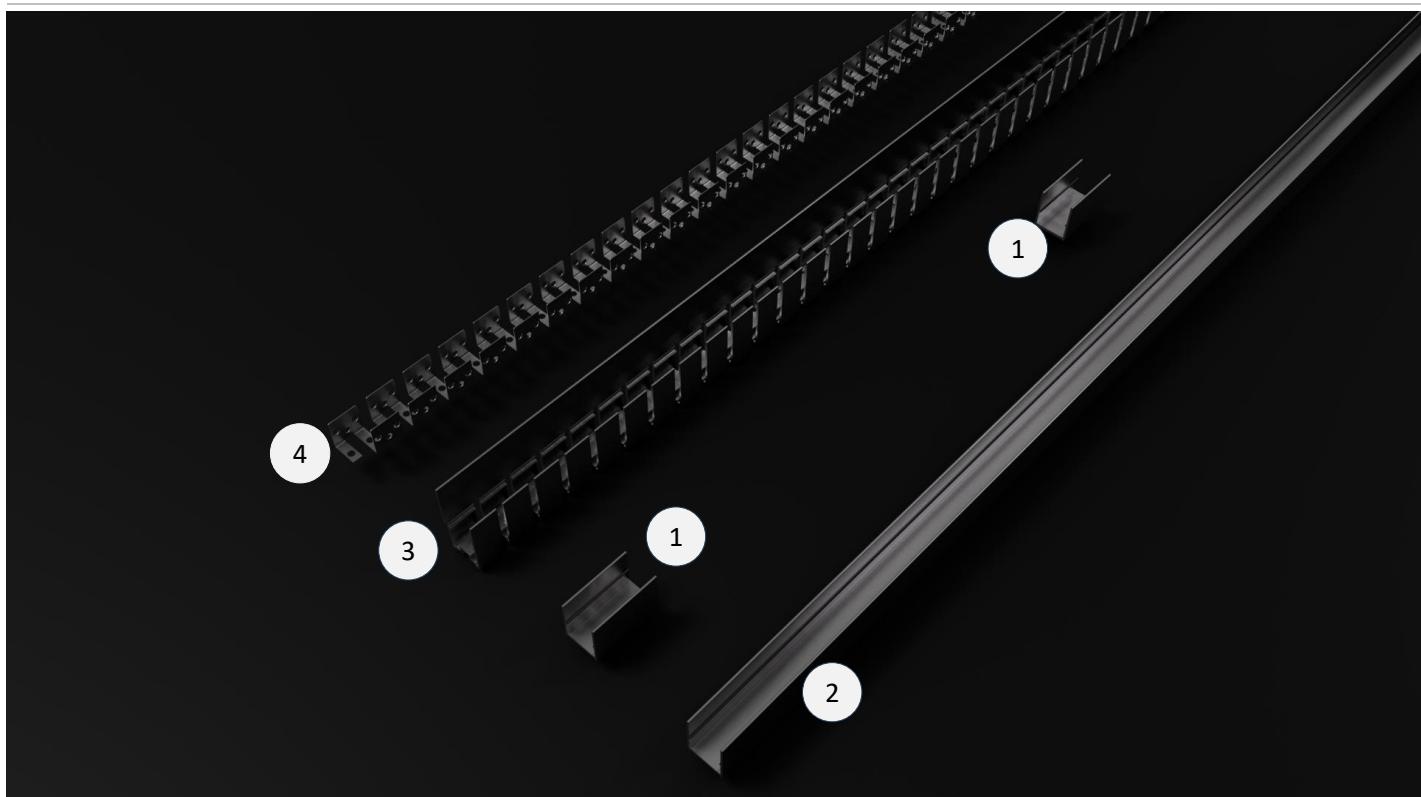

Mounting clip

1



Aluminum profile



2



Aluminum flexible profile

3

▼ Project of Flex Wall Washer

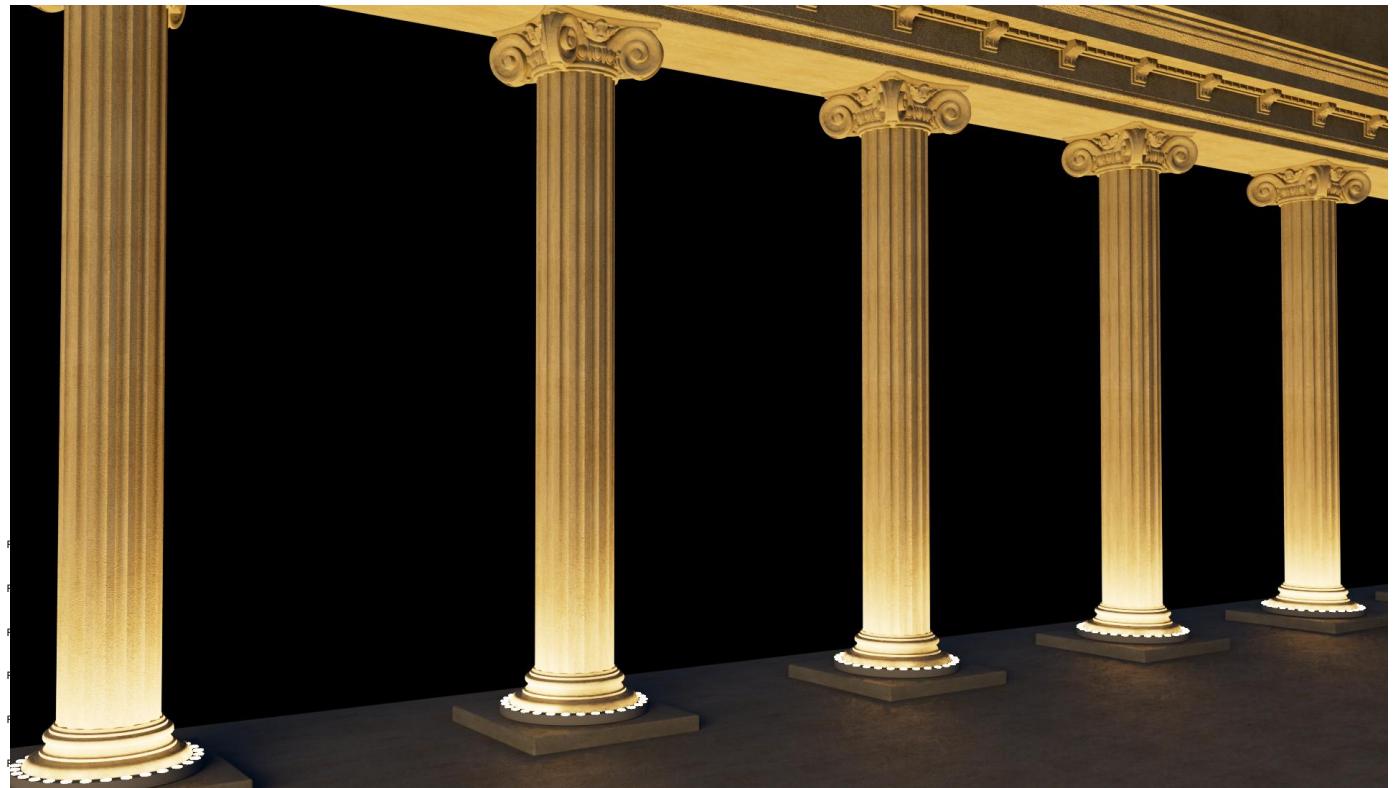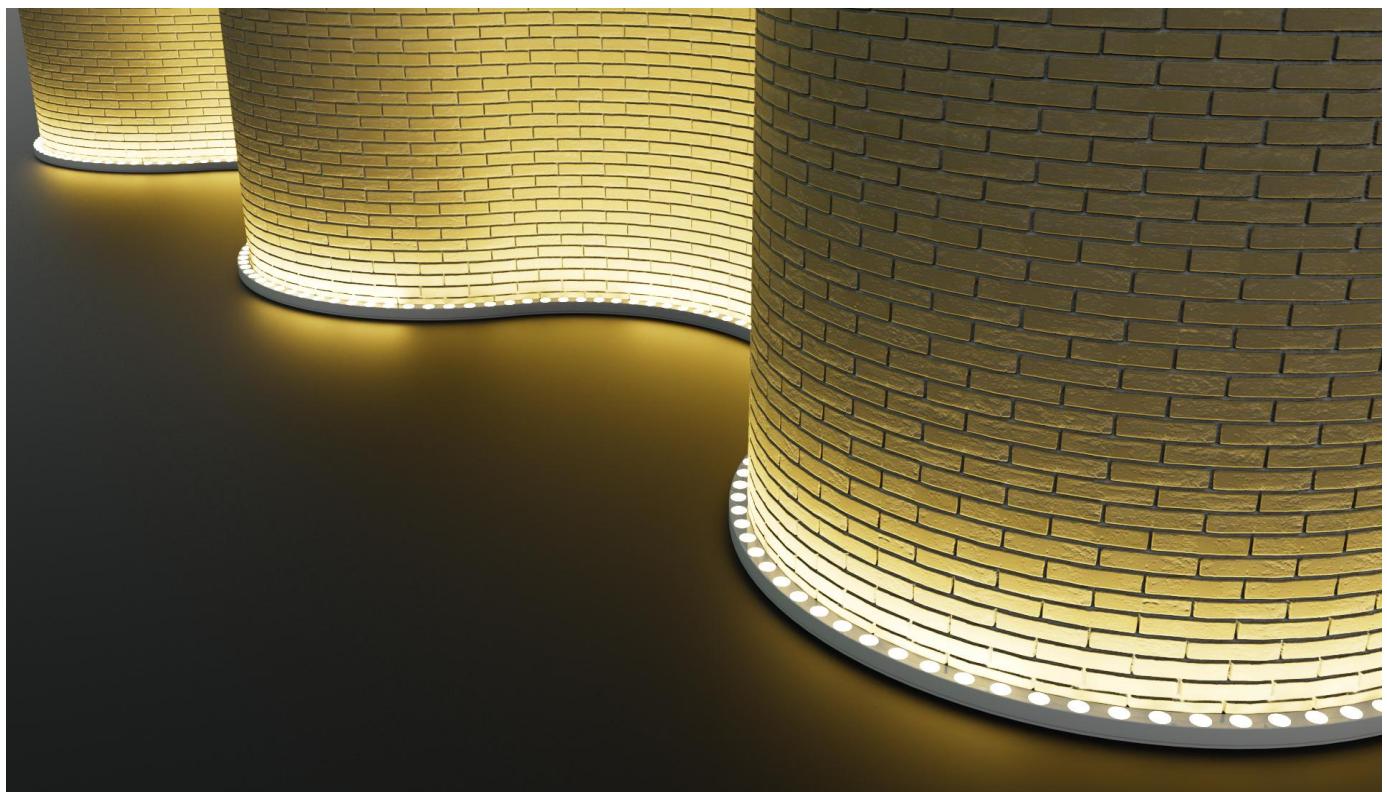

FlexWash-03D-48

FlexWash-03D-36

FlexWash-03D-48

FlexWash-03D-48

