
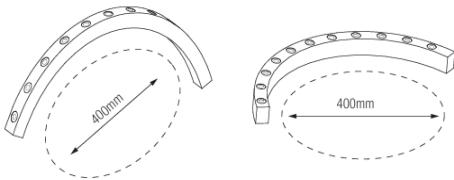




▼ 2222

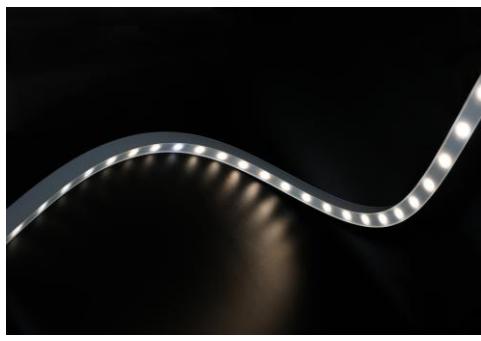

## ▼ Characteristic

### 1. Eco-Friendly Optical-Grade Silicone

-Crafted with high-transparency, optical-grade silicone that is environmentally friendly and engineered for exceptional durability. It offers strong resistance to salt, acids, alkalis, UV exposure, and flames—ideal for harsh outdoor conditions.

### 2. Flexible Form, Perfect Fit

-Innovative free-bending structural design enables seamless application across a variety of curved architectural surfaces. Designed to deliver uniform and smooth wall washing effects without light breakpoints.

### 3. IP67 Seamless Waterproofing

-Built with an integrated extrusion molding process to ensure consistent waterproof performance. Rated IP67 for long-term reliability in outdoor environments.

### 4. Patented Optical System

-Equipped with a proprietary lens design offering multiple beam angle options to suit different lighting requirements—precise, efficient, and visually refined.

### 5. Concealed End Cap Design

-A minimalist hidden end cap ensures a clean visual finish. Tool-free installation design supports rapid and secure mounting.

## ▼ Application

I+ **Infrastructure:** Airport, Railway Station, Bridge, Municipal building, Tunnel

I+ **Urban:** Administrative Building, Commercial Building, Hotel, Mall

I+ **Cultural and Entertainment:** Pavilion, Plaza, Village, Amusement park, Monuments, Cathedral, Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, PIs confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC



## ▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	Beam angle	VOLT	CUTTING (mm)	Control Mode
FlexWash-06_2222	W22xH22mm	3D Bending (Φ>400mm)	24	>80	Mono 2700-6500K	1800	15°, 20°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	ON/OFF
FlexWash-06_2222	W22xH22mm	3D Bending (Φ>400mm)	24	>80	Tunable White 2700-6500K	1680	15°, 20°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	ON/OFF


FlexWash-06_2222	W22xH22mm	3D Bending (Φ>400mm)	24	/	Chromatic (RGB)	582	20°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	ON/OFF
FlexWash-06_2222	W22xH22mm	3D Bending (Φ>400mm)	24	/	Chromatic (RGB)	582	20°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	DMX
FlexWash-06_2222	W22xH22mm	3D Bending (Φ>400mm)	24	/	Chromatic (RGBW)	1056	35°, 40°, 60°, 20x30°, 25x45°, 20x55°	DC24V	250	ON/OFF
FlexWash-06_2222	W22xH22mm	3D Bending (Φ>400mm)	24	/	Chromatic (RGBW)	1056	35°, 40°, 60°, 20x30°, 25x45°, 20x55°	DC24V	250	DMX

**Notes:**


1. Finish: White, and customized Black, Grey available
2. It has six different sizes from 15W-48W.

### ▼ Installation Method

Surface Mounted

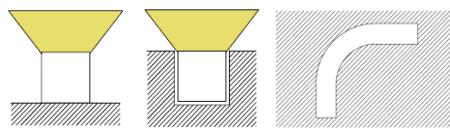

### ▼ Outlet Method




Bottom Outlet


Straight Outlet

Side Outlet


### ▼ Photometric curve




15°



30°





45°




20x30°


### ▼ Accessories

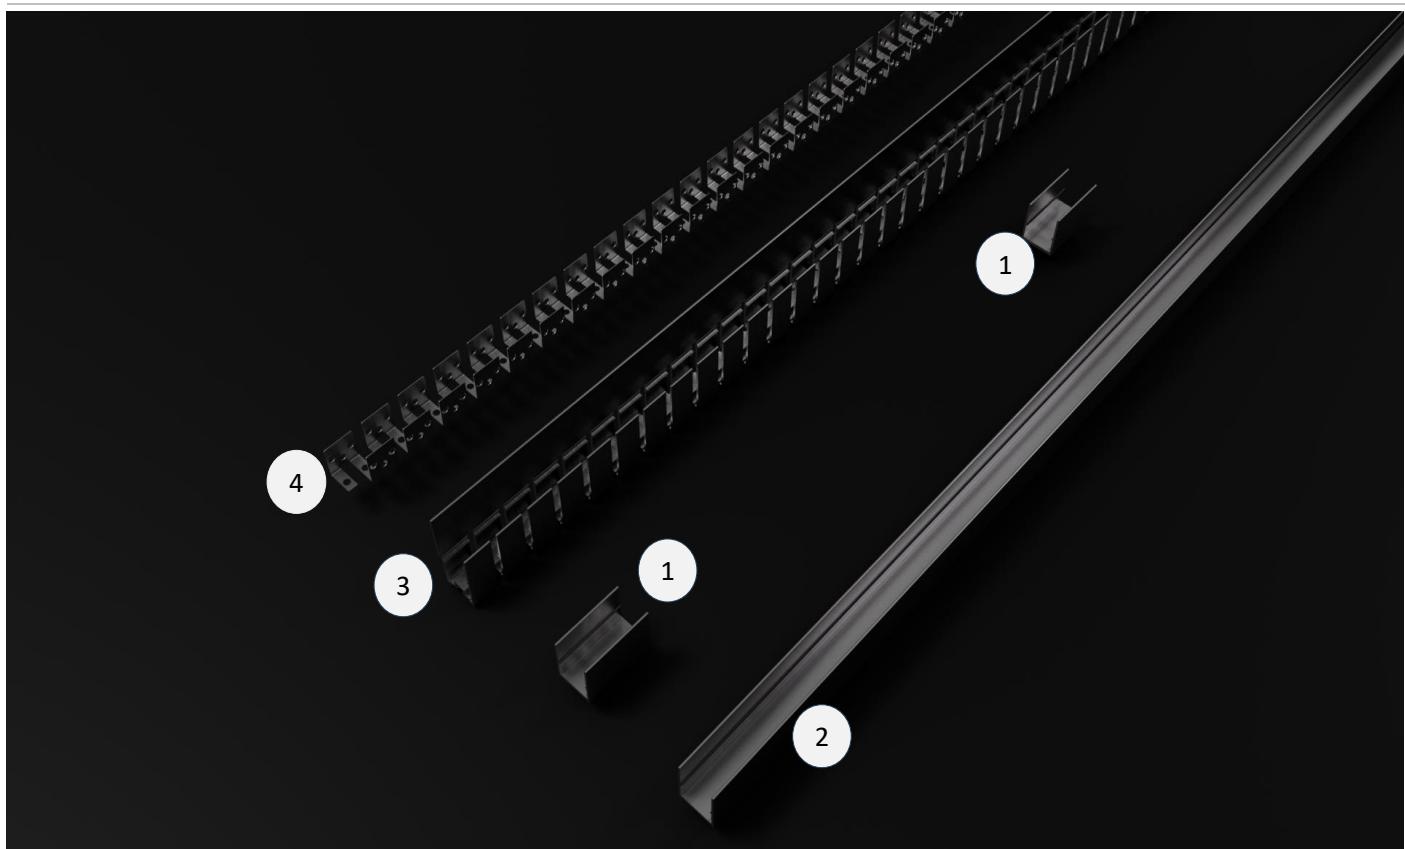


Mounting clip




Aluminum profile




Aluminum flexible profile

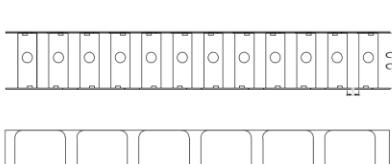

Stainless steel flexible chain





Aluminum profile & bracket



Flex Aluminum profile with shield & bracket

▼ Project of Flex Wall Washer

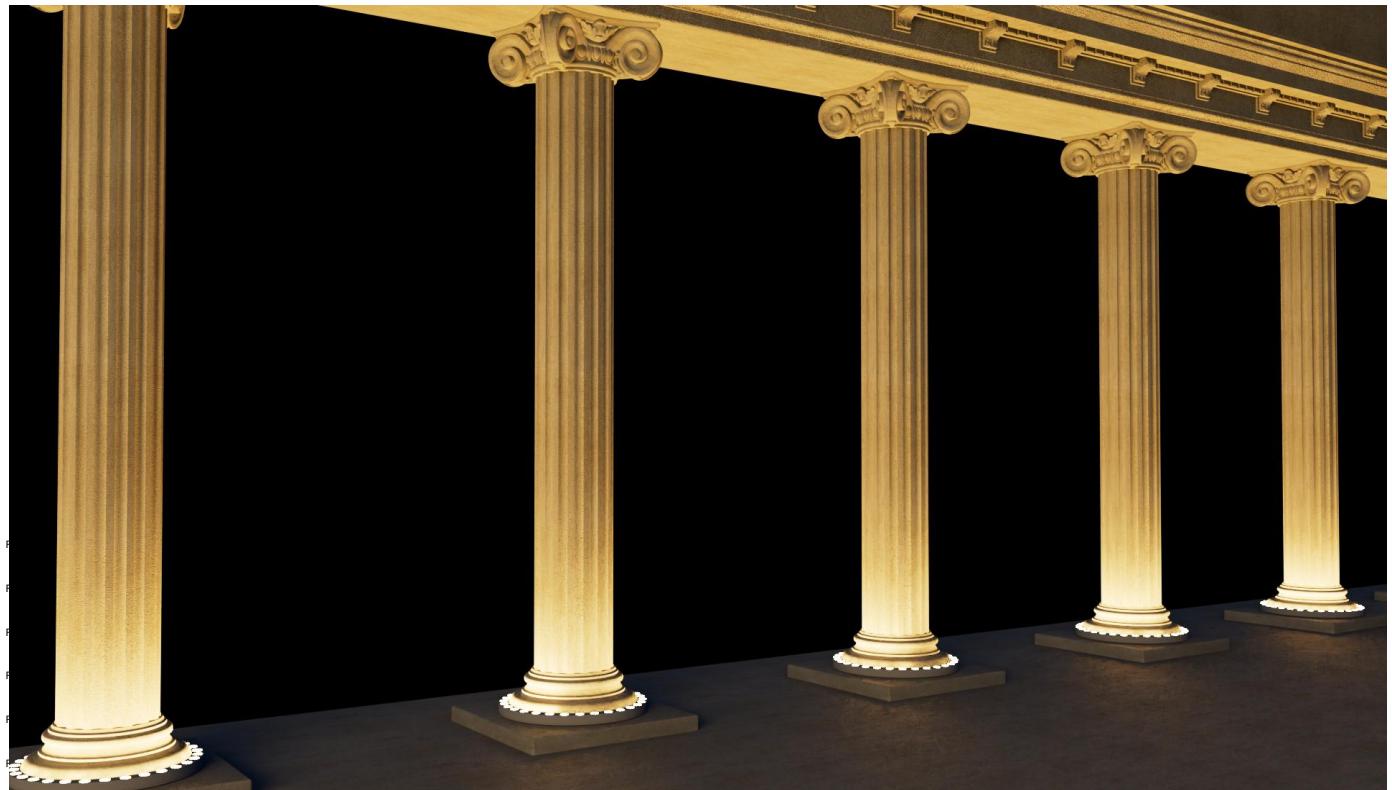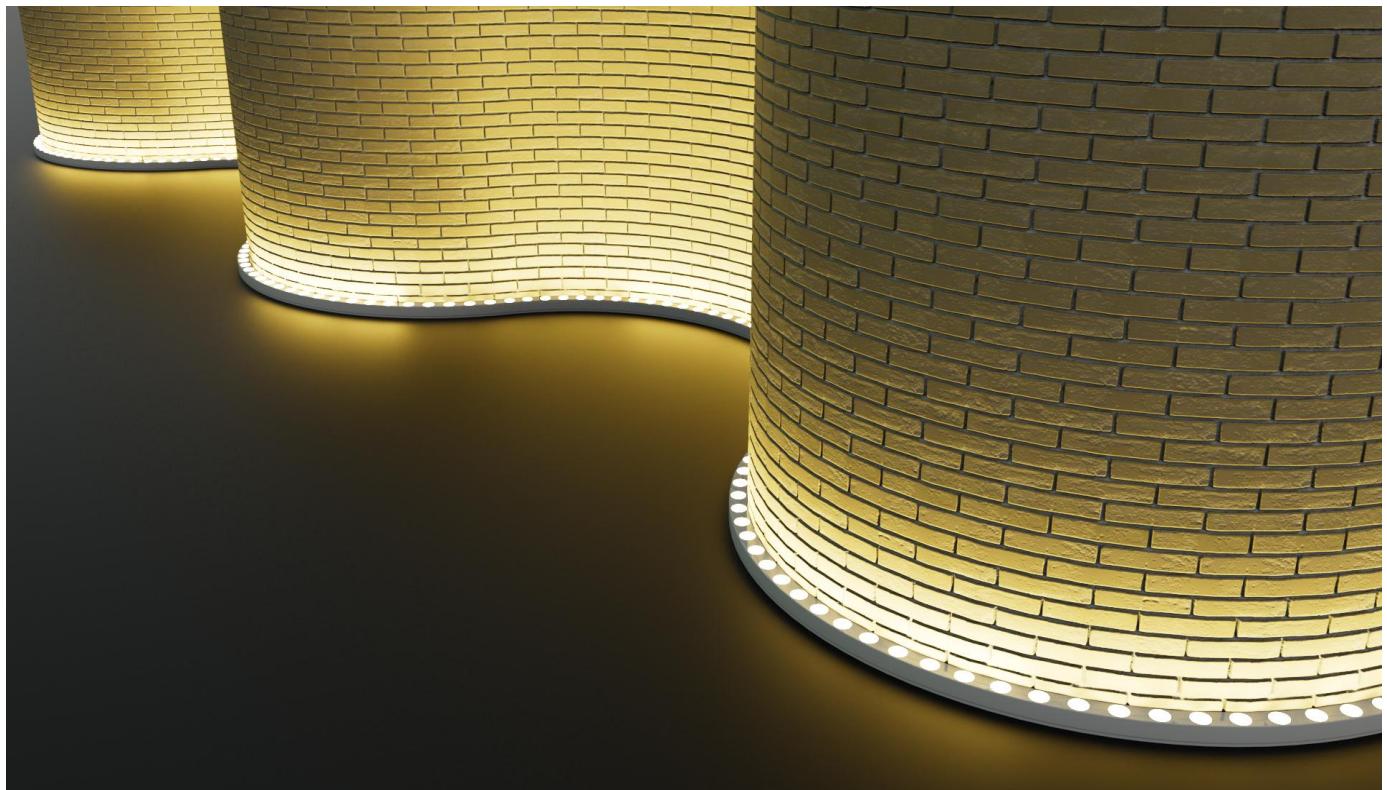

FlexWash-03D-48

FlexWash-03D-36

FlexWash-03D-48

FlexWash-03D-48



