
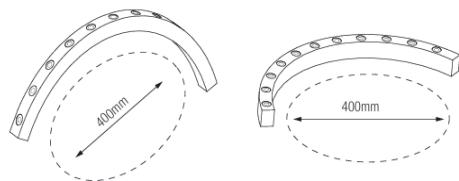

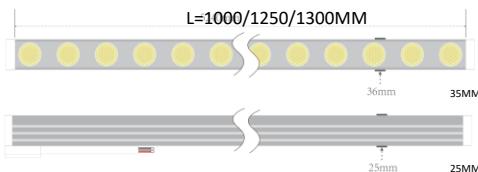


▼ 3525

### ▼ Characteristic

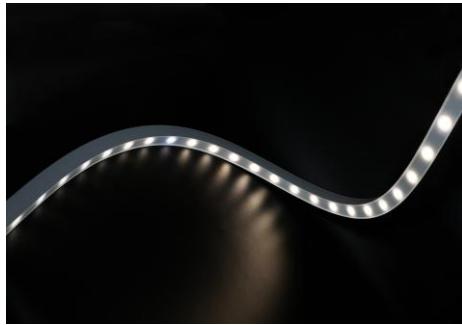

#### 1.Eco-Friendly Optical-Grade Silicone

-Crafted with high-transparency, optical-grade silicone that is environmentally friendly and engineered for exceptional durability. It offers strong resistance to salt, acids, alkalis, UV exposure, and flames—ideal for harsh outdoor conditions.

#### 2.Flexible Form, Perfect Fit

-Innovative free-bending structural design enables seamless application across a variety of curved architectural surfaces. Designed to deliver uniform and smooth wall washing effects without light breakpoints.

#### 3.IP67 Seamless Waterproofing

-Built with an integrated extrusion molding process to ensure consistent waterproof performance. Rated IP67 for long-term reliability in outdoor environments.

#### 4.Patented Optical System

-Equipped with a proprietary lens design offering multiple beam angle options to suit different lighting requirements—precise, efficient, and visually refined.

#### 5.Concealed End Cap Design

-A minimalist hidden end cap ensures a clean visual finish. Tool-free installation design supports rapid and secure mounting.

### ▼ Application

► **Infrastructure:** Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

► **Urban:** Administrative Building , Commercial Building , Hotel , Mall

► **Cultural and Entertainment:** Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available,  
PIS confirm before ordering.



ON/OFF 0-10V DAL DMX TRIAC



### ▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	Beam angle	VOLT	CUTTING (mm)	Control Mode
FlexWash-06_3525	W35xH25mm	3D Bending (Φ>400mm)	32	>80	Mono 2700-6500K	2400	15°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	ON/OFF
FlexWash-06_3525	W35xH25mm	3D Bending (Φ>400mm)	36	>80	Mono 2700-6500K	2700	15°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	ON/OFF


FlexWash-06_3525	W35xH25mm	3D Bending (Φ>400mm)	36	>80	Tunable White 2700-6500K	2700	15°, 30°, 45°, 20x30°, 20x36°, 25x45°, 20x55°	DC24V	250	ON/OFF
FlexWash-06_3525	W35xH25mm	3D Bending (Φ>400mm)	36	/	Chromatic (RGBW)	1260	30°, 40°, 60°, 20x30°, 25x45°, 20x55°	DC24V	250	ON/OFF
FlexWash-06_3525	W35xH25mm	3D Bending (Φ>400mm)	36	/	Chromatic (RGBW)	1260	30°, 40°, 60°, 20x30°, 25x45°, 20x55°	DC24V	250	DMX

[a]Notes:


1. Finish: White, and customized Black, Grey available
2. It has six different sizes from 15W-48W.

## ▼ Installation Method


Surface Mounted

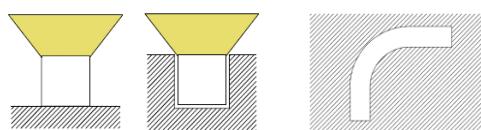


## ▼ Outlet Method

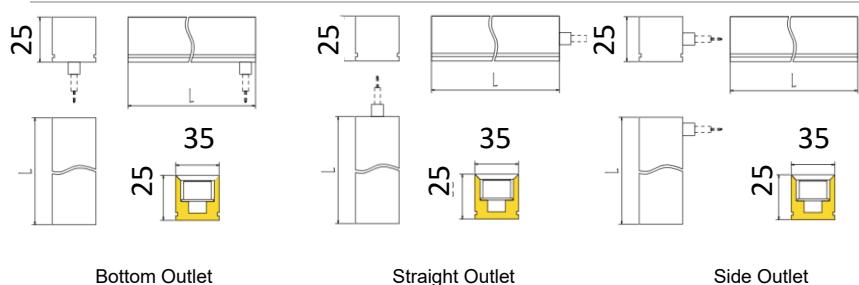


## ▼ Photometric curve




15°



30°




45°



20x30°

### ▼ Accessories

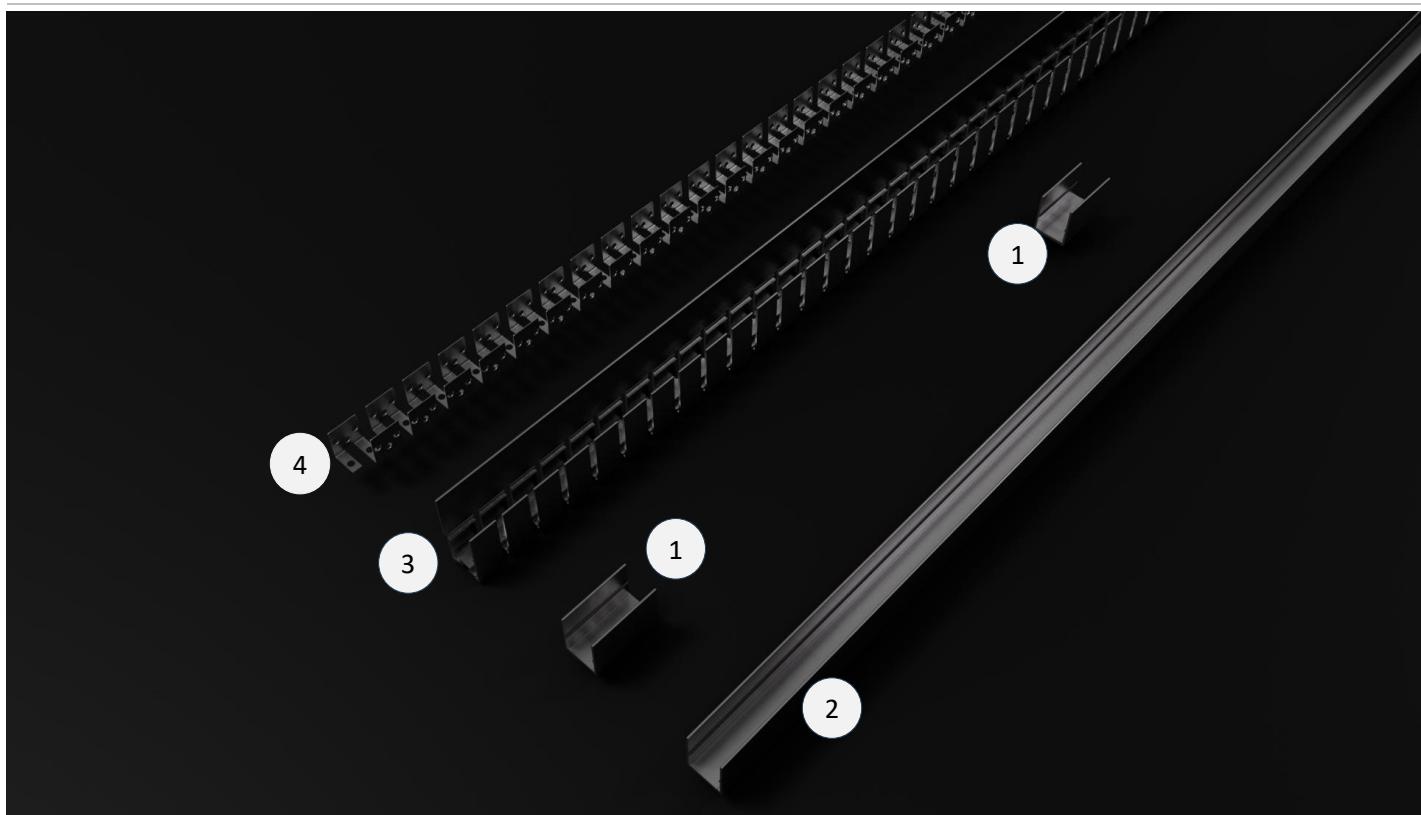

Mounting clip  
W37xH44mm

1



Aluminum profile  
L1000xW37xH44mm


2



Aluminum flexible profile  
L1000xW37xH44mm

3

▼ Project of Flex Wall Washer

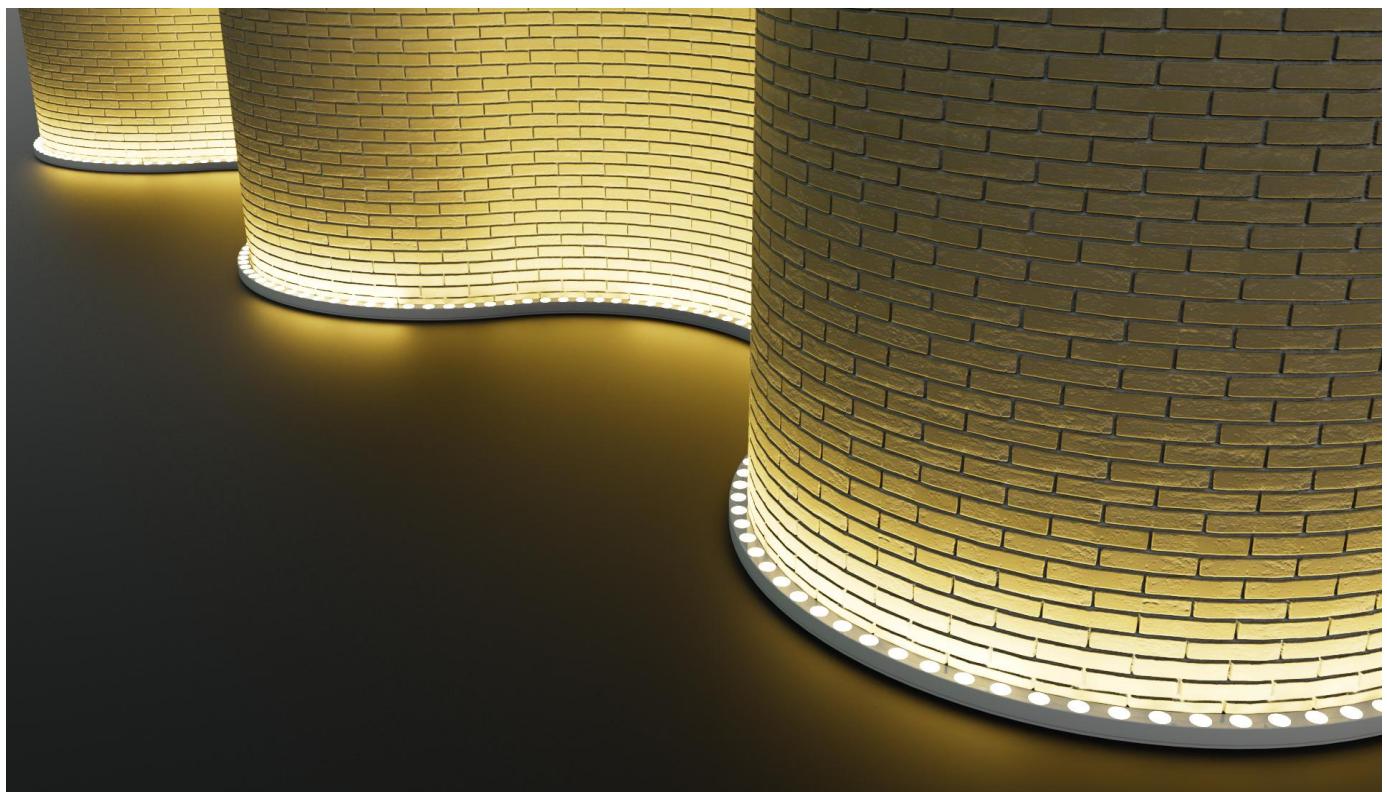

FlexWash-03D-48

FlexWash-03D-36

FlexWash-03D-48

FlexWash-03D-48



