
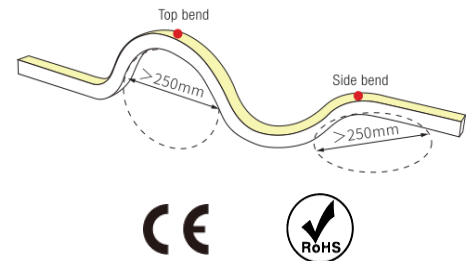
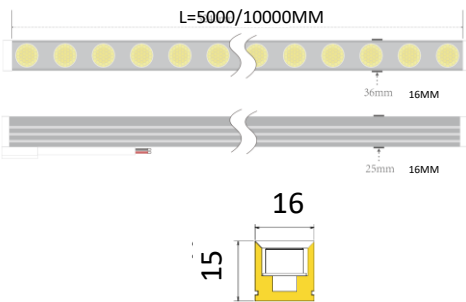


▼ Characteristic

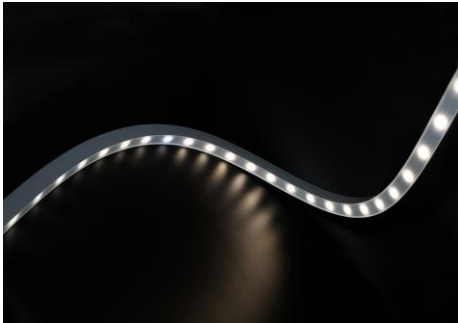

- 1.Eco-Friendly Optical-Grade Silicone**
-Crafted with high-transparency, optical-grade silicone that is environmentally friendly and engineered for exceptional durability. It offers strong resistance to salt, acids, alkalis, UV exposure, and flames—ideal for harsh outdoor conditions.
- 2.Flexible Form, Perfect Fit**
-Innovative free-bending structural design enables seamless application across a variety of curved architectural surfaces. Designed to deliver uniform and smooth wall washing effects without light breakpoints.
- 3.IP67 Seamless Waterproofing**
-Built with an integrated extrusion molding process to ensure consistent waterproof performance. Rated IP67 for long-term reliability in outdoor environments.
- 4.Patented Optical System**
-Equipped with a proprietary lens design offering multiple beam angle options to suit different lighting requirements—precise, efficient, and visually refined.
- 5.Concealed End Cap Design**
-A minimalist hidden end cap ensures a clean visual finish. Tool-free installation design supports rapid and secure mounting.

▼ Application

✚ **Infrastructure:** Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

✚ **Urban:** Administrative Building , Commercial Building , Hotel , Mall

✚ **Cultural and Entertainment:** Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DAL DMX TRIAC

▼ Technical Data


Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	Beam angle	VOLT	CUTTING (mm)	Control Mode
FlexWash-06_1615	W16xH15mm	3D Bending ($\Phi > 250\text{mm}$)	15	>80	Mono 2700-6500K	1050~1125	15°,20° 30°,45°,60° ,20x30°,20x36° ,25x45°,20x55°	DC24V	41.5	ON/OFF
FlexWash-06_1615	W16xH15mm	3D Bending ($\Phi > 250\text{mm}$)	15	>80	Tunable White 2700-6500K	1050~1125	15°,20° 30°,45°,60° ,20x30°,20x36° ,25x45°,20x55°	DC24V	41.5	ON/OFF

FlexWash-06_1615	W16xH15mm	3D Bending ($\Phi > 250\text{mm}$)	15	/	Chromatic (RGBW)	525	30°,45°,60°,20x30° ,20x36°,25x45° ,20x55°	DC24V	/	ON/OFF
FlexWash-06_1615	W16xH15mm	3D Bending ($\Phi > 250\text{mm}$)	15	/	Chromatic (RGBW)	525	30°,45°,60°,20x30° ,20x36°,25x45° ,20x55°	DC24V	/	ON/OFF


- Notes:
- 1. Finish: White, and customized Black, Grey available
 - 2. It has six different sizes from 15W-48W.

Installation Method


Surface Mounted

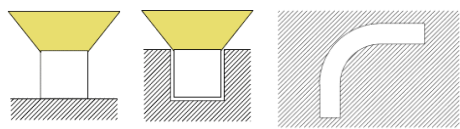


Outlet Method

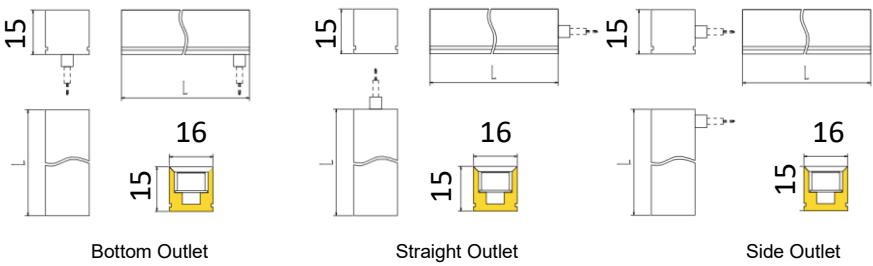

Photometric curve

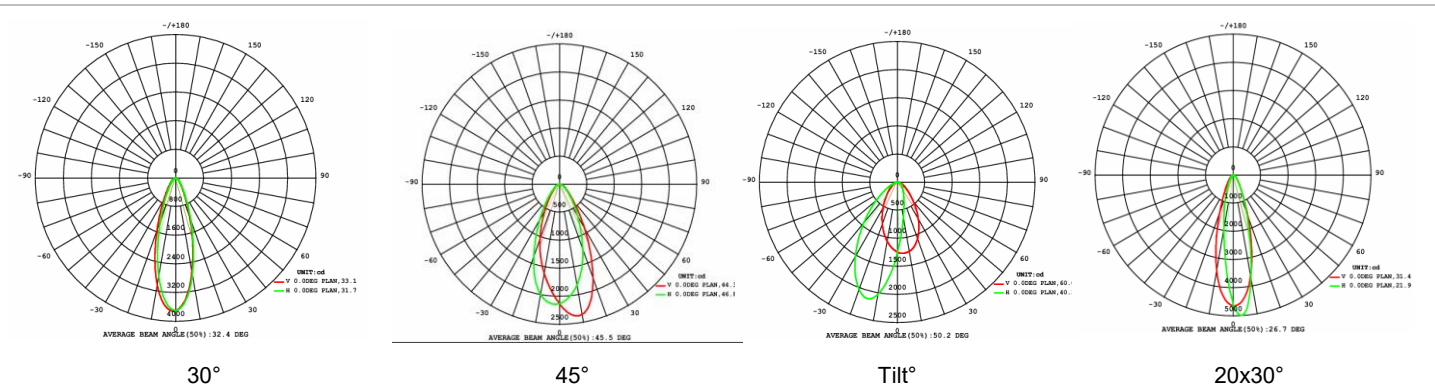


▼ Accessories

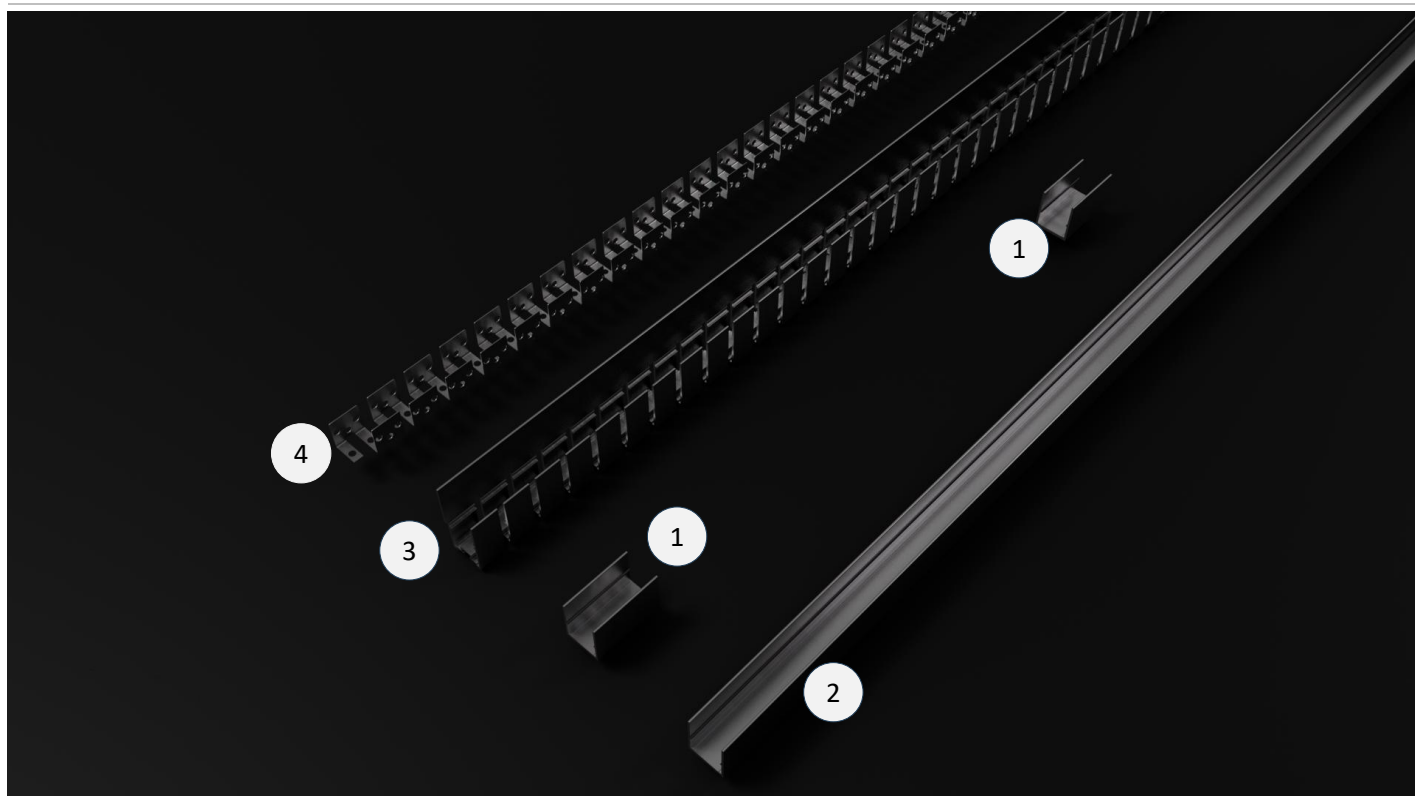

Mounting clip

1

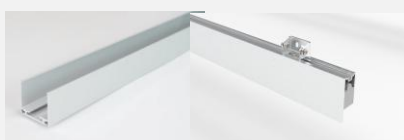

Aluminum profile


2



Aluminum flexible profile

3

▼ Project of Flex Wall Washer

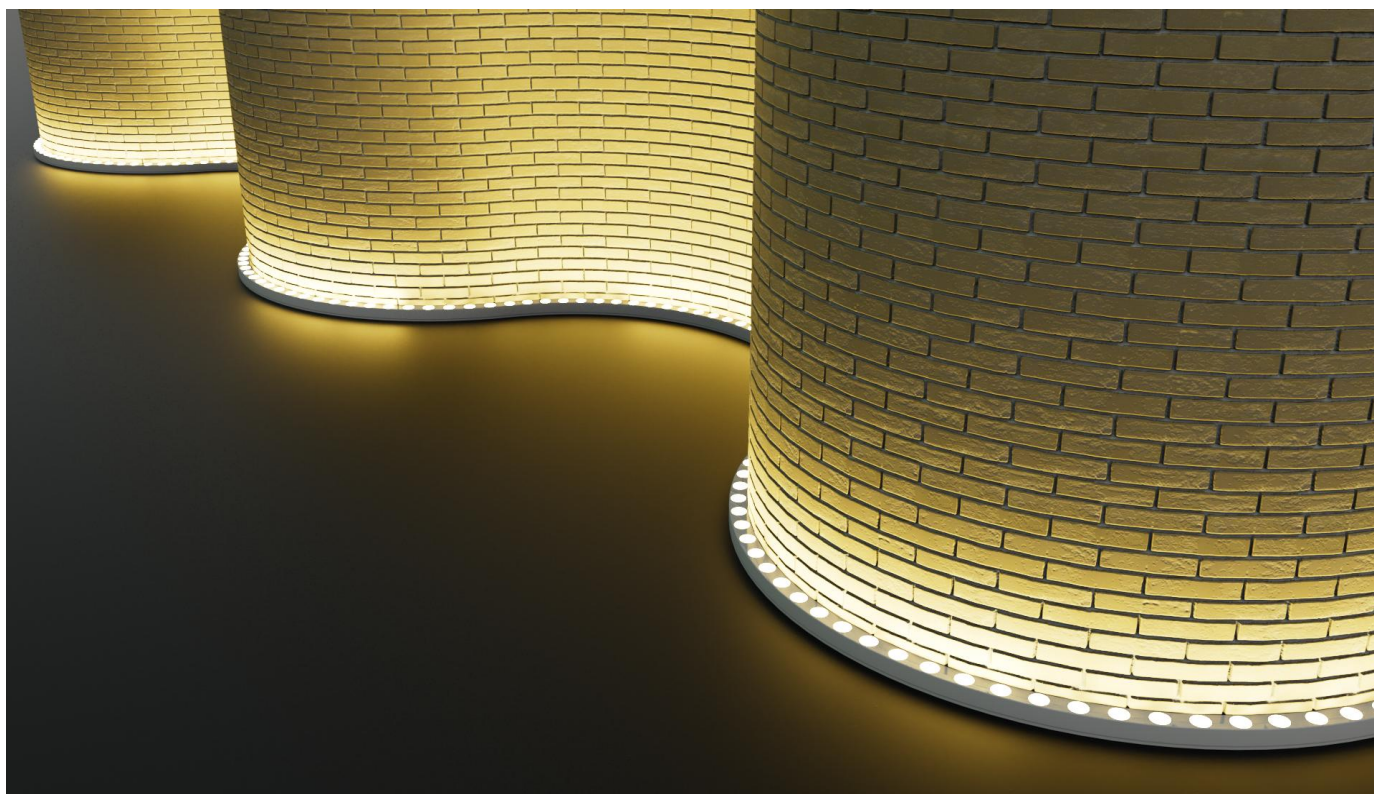

FlexWash-03D-48

FlexWash-03D-36



