



▼ 2264

▼ Characteristic

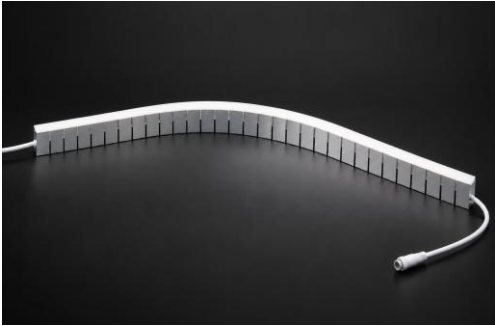

1. High Load Resistance
IK10 impact rating. Engineered to withstand frequent pedestrian traffic and vehicle loads without deformation or failure.
2. Continuous & Seamless Illumination
Bottom-entry cabling and seamless end-to-end connections ensure a smooth, dot-free luminous surface.
3. Flexible Structure
Bendable in horizontal or vertical directions, ideal for curved ground paths and landscape contours.
4. Outdoor Durability
IP67 waterproof and UV resistant. Operates stably in rain, dust, and high-humidity conditions.
5. Modular & Maintainable
Detachable housing allows for easy replacement, cleaning, and troubleshooting of internal light strips without damaging the installation. Working at -25°C~60°C.
6. Multiple Options
Available in single color (2700K–6500K), RGB, RGBW, SPI/DMX control, various dimensions and wattages.

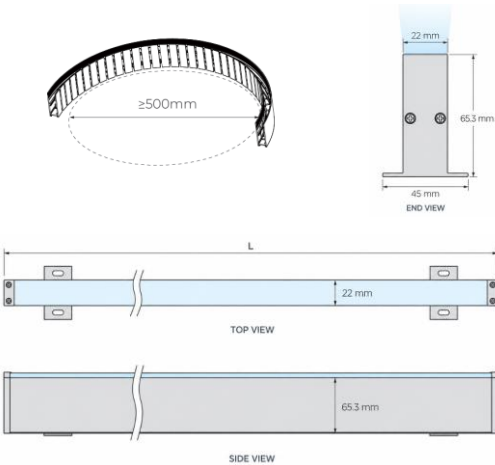

▼ Application

- I+Infrastructure: Airport ,Railway Station ,Bridge , Municipal building , Tunnel
- I+Urban: Administrative Building , Commercial Building , Hotel , Mall
- I+ Cultural and Entertainment: Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site



▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available,
Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

▼ Technical Data


MODEL	SIZE (MM)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	BEAM ANGLE	CUTT LENGTH (MM)	MAX RUN (M/ROLL)	VOLTAGE	CONTROL MODE	REMARK
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=2200K	303	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=2700K	304	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=3000K	310	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=3500K	331	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=4000K	339	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=5000K	339	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	>90	Mono 2200-5000K W=6500K	333	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	/	Mono Red	128	Diffused	50	10	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	/	Mono Green	316	Diffused	50	9	DC24V	ON/OFF	/
FlexGround-03_2264	W22*H64mm	Side Bending	10	/	Mono Blue	66	Diffused	50	7	DC24V	ON/OFF	/

FlexGround-03_2264	W22"H64mm	Side Bending	10	/	Mono Yellow	87	Diffused	50	9	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	10	/	Mono Orange	102	Diffused	50	9	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	10	/	Mono Pink	300	Diffused	50	7	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	15	/	Tunable white 2700-6000K	455	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	7.5	/	Tunable white 2700-6500K W=2700K	220	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	7.5	/	Tunable white 2700-6500K W=6000K	240	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	10	/	Chromatic (RGB)	182	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	3.3	/	chromatic (R)	36	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	3.3	/	chromatic (G)	128	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	3.3	/	chromatic (B)	20	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	15	/	Chromatic (RGBW, W=2700 K)	375	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	3	/	Chromatic (R)	32	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	3	/	Chromatic (G)	126	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	3	/	Chromatic (B)	22	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	6	/	chromatic (W)	199	Diffused	83.3	5	DC24V	ON/OFF	/
FlexGround-03_2264	W22"H64mm	Side Bending	15	/	Chromatic (RGBW, W=4000 K)	195	Diffused	125	8	DC24V	DMX512	UCS512 CL
FlexGround-03_2264	W22"H64mm	Side Bending	3	/	Chromatic (R)	28	Diffused	125	8	DC24V	ON/OFF	UCS512 CL
FlexGround-03_2264	W22"H64mm	Side Bending	3	/	Chromatic (G)	70	Diffused	125	8	DC24V	ON/OFF	UCS512 CL
FlexGround-03_2264	W22"H64mm	Side Bending	3	/	Chromatic (B)	19	Diffused	125	8	DC24V	ON/OFF	UCS512 CL
FlexGround-03_2264	W22"H64mm	Side Bending	6	/	chromatic (W)	86	Diffused	125	8	DC24V	ON/OFF	UCS512 CL


Notes: MONO(2200,2700K,3000K,3500K,4000K,4500K,5000K,Red,Green,Blue, Amber),Tunable White(2700-6500K),Chromatic(RGB,RGBW)

▼ Installation Method


1. Recessed Mounting




▼ Outlet Method

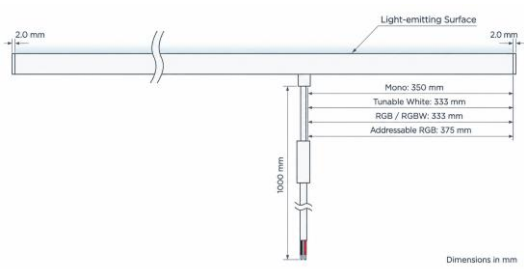

▼ Photometric curve



▼ Technical Structure

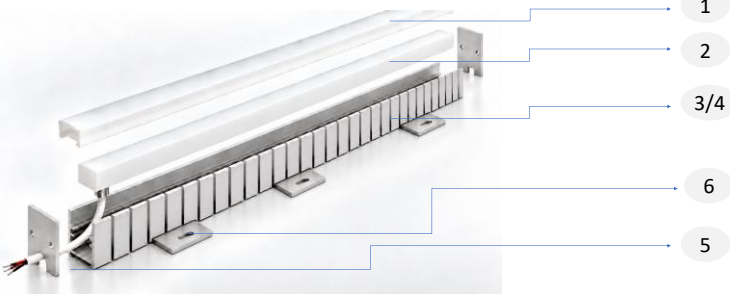

▼ Installation Accessories

